


MOUNTING BRACKETS MAY BE LOCATED ANYWHERE ALONG BACK OF STATIC BAR AND THEN LOCKED IN PLACE

PERFORATED STRIP MAY BE BENT TO SUIT INSTALLATION

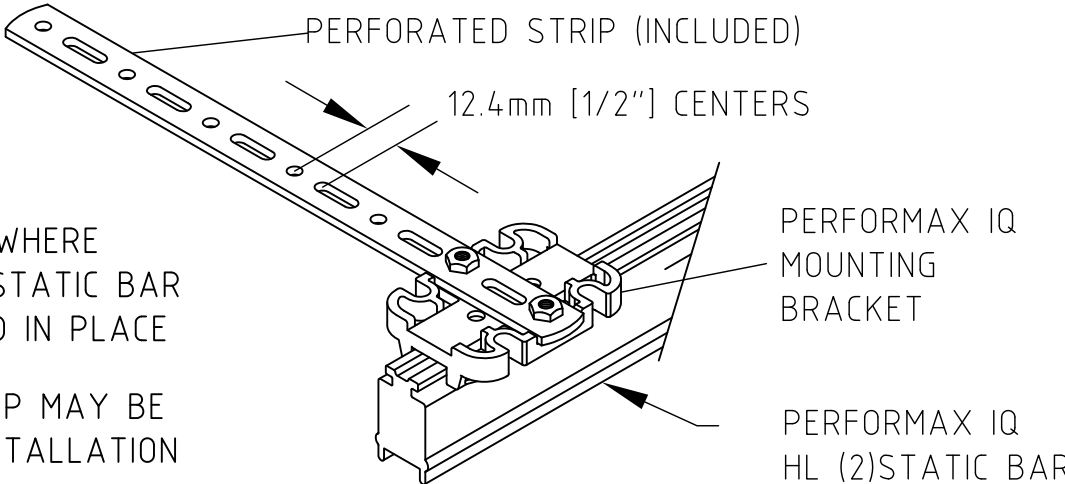

PERFORATED STRIP (INCLUDED)

12.4mm [1/2"] CENTERS

PERFORMAX IQ MOUNTING BRACKET


PERFORMAX IQ HL (2)STATIC BAR

BAR TYPE	EMITTER SPACING	NUMBER OF EMITTERS	
		MINIMUM	MAXIMUM
SPEED	30mm	8	130
HYBRID	90mm	8	44

BARS ALWAYS HAVE AN EVEN NUMBER OF EMITTERS.

EFFECTIVE LENGTH = (NUMBER OF EMITTERS - 1) X EMITTER SPACING

STANDARD MOUNTING BRACKETS	AVAILABLE LENGTHS
----------------------------	-------------------

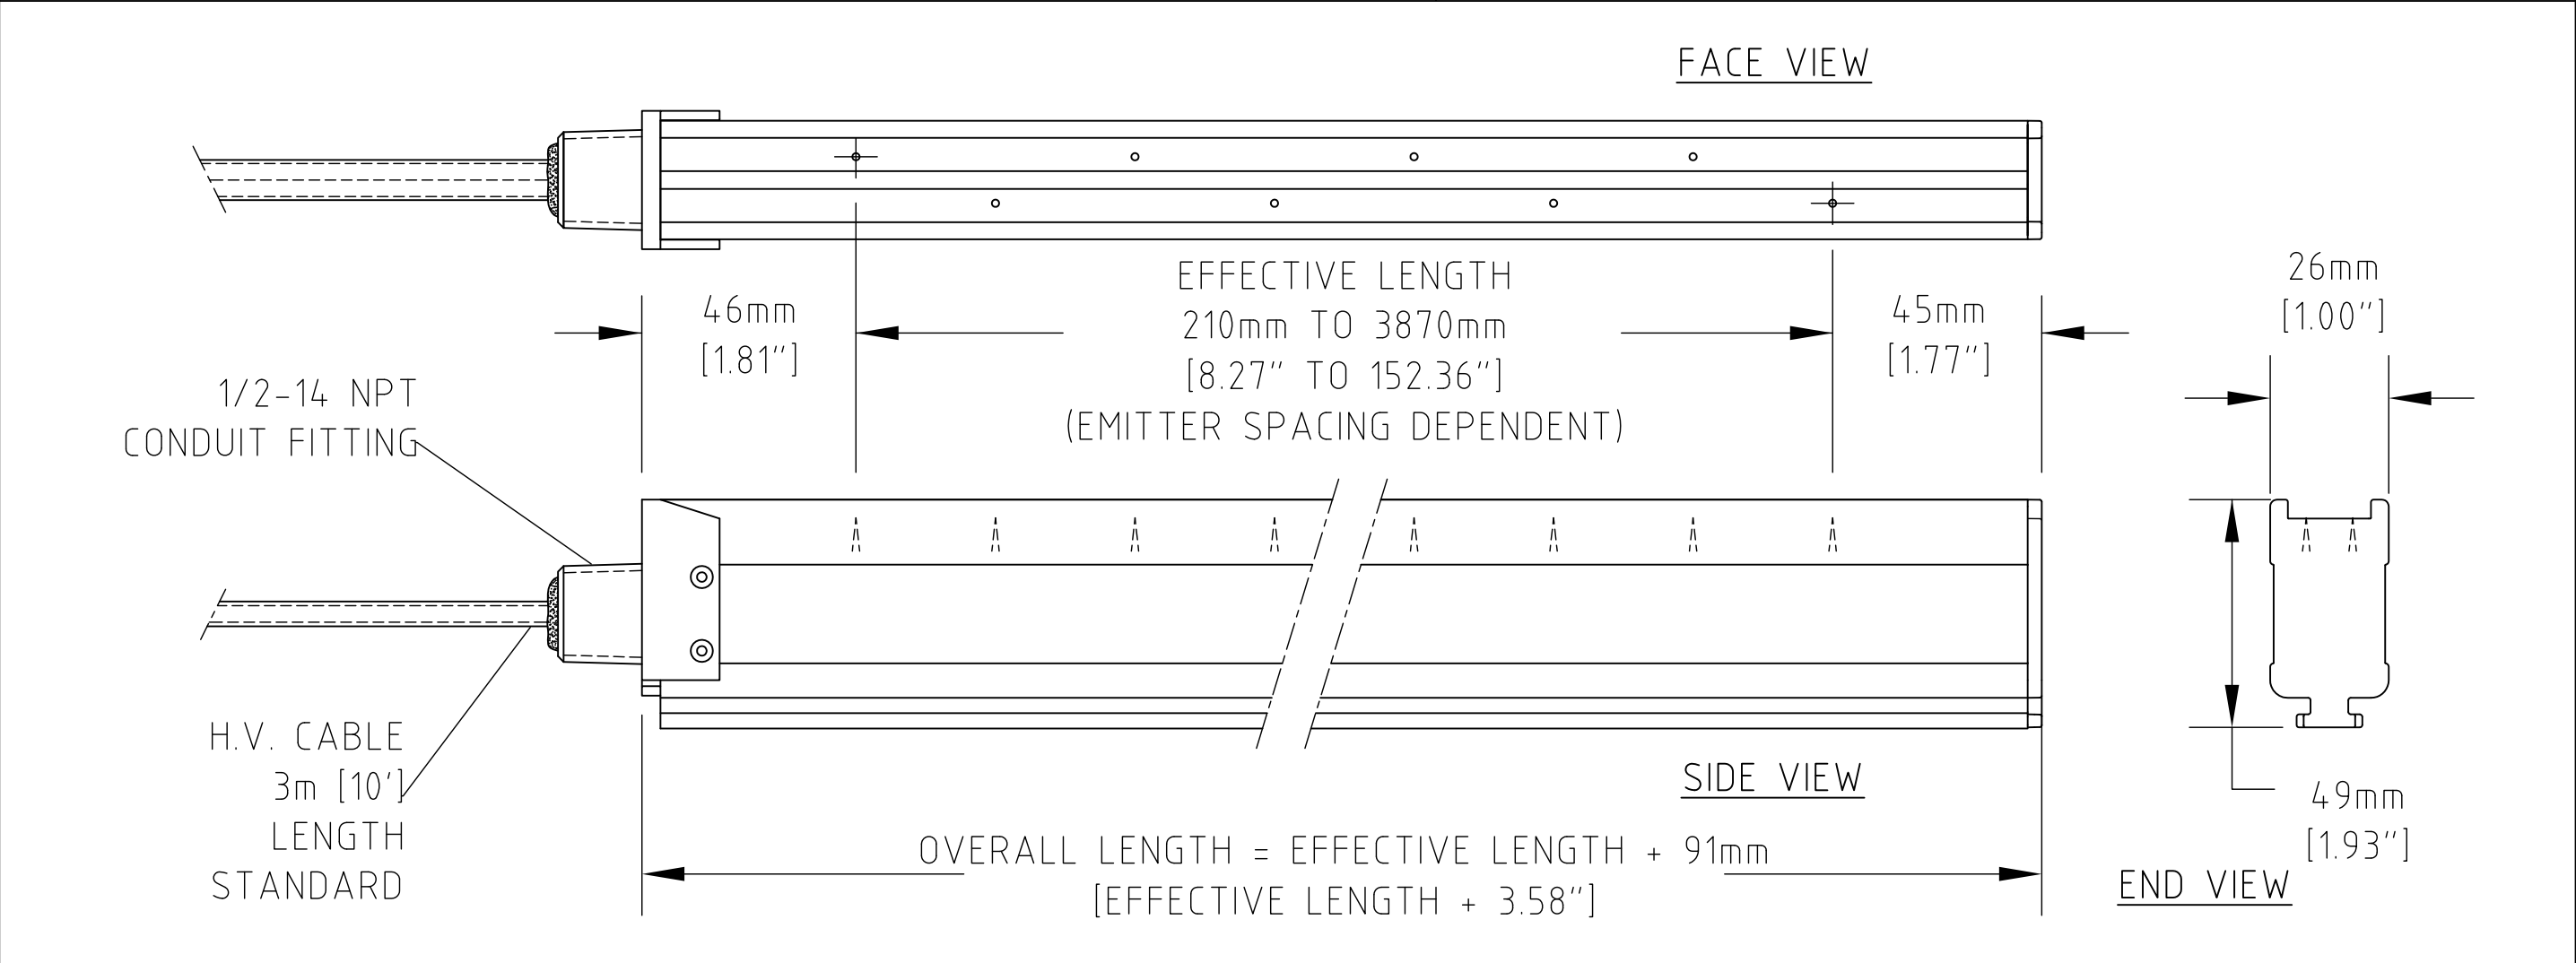

Bar Type	OverAll Bar Range Lengths	Quantity Mounting kits Supplied
IQ Power HL Speed	301mm to 1981mm	2
	2041mm to 2941mm	3
	3001mm to 3961mm	4
IQ Power HL Speed-T	301mm to 1981mm	2
	2041mm to 2941mm	3
	3001mm to 3961mm	4
IQ Power HL Hybrid	721mm to 1981mm	2
	2161mm to 2941mm	3
	3061mm to 3961mm	4

題名 TITLE PERFORMAX IQ HL STATIC BAR		尺度 SCALE 1/2	単位 UNITS mm	
材質 MATERIAL -	備考 NOTE 5001255 USA (original)	作図 Dr. Y.Kanzaki	検図 Chk. M.Kawakita	日付 DATE 2016.04.04
シムコジャパン株式会社		設計図番 CODE -	図面番号 DRAWING No. B130827012	