


MOUNTING BRACKETS MAY BE LOCATED ANYWHERE ALONG BACK OF STATIC BAR AND THEN LOCKED IN PLACE

PERFORATED STRIP MAY BE BENT TO SUIT INSTALLATION

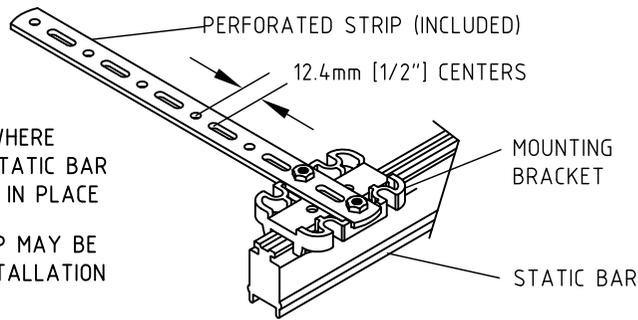

TYPE	SPACING	MINIMUM	MAXIMUM
		SPEED	30mm
HYBRID	90mm	8	44
DISTANCE	180mm	8	22

BARS ALWAYS HAVE AN EVEN NUMBER OF EMITTERS.

EFFECTIVE LENGTH = (NUMBER OF EMITTERS - 1) X EMITTER SPACING

STANDARD MOUNTING BRACKETS

AVAILABLE BAR LENGTHS



H.V. CABLE, 3m [10'] LENGTH STANDARD

H.V. PLUG


45.03mm [1.77"] (BOTH ENDS)

EFFECTIVE LENGTH 210mm TO 3870mm [8.27" TO 152.36"] (EMITTER SPACING DEPENDENT)

FACE VIEW

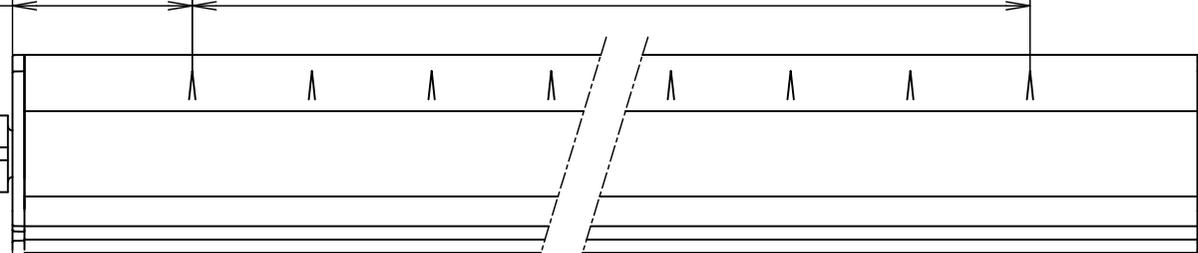

SIDE VIEW



END VIEW

OVERALL LENGTH = EFFECTIVE LENGTH + 90mm [EFFECTIVE LENGTH + 3.54"]

Bar Type	OverAll Bar Range Lengths	Quantity Mounting kits Supplied
IQ Power Speed	300mm to 1980mm	2
	2040mm to 2940mm	3
	3000mm to 3960mm	4
IQ Power Speed-T	300mm to 1980mm	2
	2040mm to 2940mm	3
	3000mm to 3960mm	4
IQ Power Hybrid	720mm to 1980mm	2
	2160mm to 2880mm	3
	3060mm to 3960mm	4
IQ Power Distance	1350mm to 1710mm	2
	2070mm to 2790mm	3
	3150mm to 3870mm	4

題名 TITLE IQ POWER STATIC BAR		尺度 SCALE 1/2	単位 UNITS mm	
材質 MATERIAL -	備考 NOTE 5001241 USA (original)	作図 Dr. Y.Kanzaki	検図 Chk. M.Kawakita	日付 DATE 2016.04.04
シムコジャパン株式会社		設計図番 CODE -	図面番号 DRAWING No. B141216112	